

Fitting Instructions

Model 7770

Input: 220/240V 50Hz

Output: 8V 1Amp


Byron

An electrician qualified to IEE regulations must install this Transformer

Warning! Before carrying out any electrical work always turn off your mains supply.

- 1) Insert a screwdriver into the lug holes on top of the top and bottom covers to reveal the terminals
- 2) Fix transformer in place using screws and plugs provided in the 4 fixing holes
- 3) Connect the mains cable to the 220/240V terminals on the bottom of the transformer and screw down to secure
- 4) Connect bell wire to the required terminals inside your chime for transformer operation
- 5) Connect the other end of your bell wire to the 8V terminals on the top of the transformer and screw down to secure
- 6) Replace top and bottom covers
- 7) Switch on mains power and test

This transformer is fitted with a safety internal thermal cut-off switch, which will reset itself after 5 minutes, in the case of a fault.

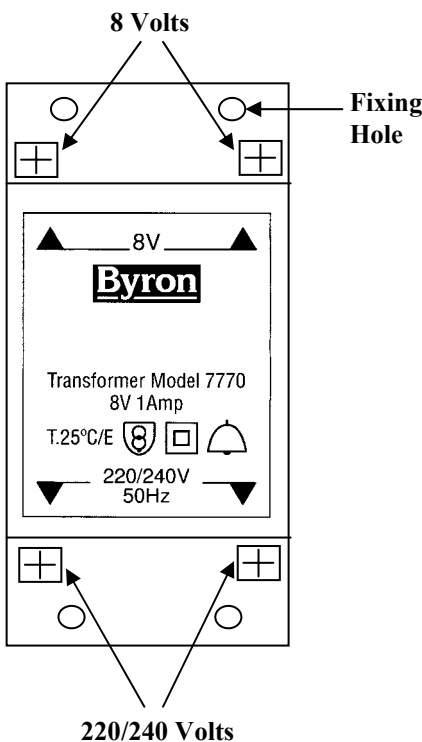

Fitting Instructions

Model 7770

Input: 220/240V 50Hz

Output: 8V 1Amp

Byron

An electrician qualified to IEE regulations must install this Transformer

Warning! Before carrying out any electrical work always turn off your mains supply.

- 1) Insert a screwdriver into the lug holes on top of the top and bottom covers to reveal the terminals
- 2) Fix transformer in place using screws and plugs provided in the 4 fixing holes
- 3) Connect the mains cable to the 220/240V terminals on the bottom of the transformer and screw down to secure
- 4) Connect bell wire to the required terminals inside your chime for transformer operation
- 5) Connect the other end of your bell wire to the 8V terminals on the top of the transformer and screw down to secure
- 6) Replace top and bottom covers
- 7) Switch on mains power and test

This transformer is fitted with a safety internal thermal cut-off switch, which will reset itself after 5 minutes, in the case of a fault.