



# Lightweight PE foam wood underlay **with vapour barrier**

- Protects against damp**  
 With a clear printed vapour barrier on one side, Barrier effectively and economically stops moisture rising from the subfloor to keep your floor dry.
- Support against impact shock**  
 Barrier gives your floor covering the perfect level of support, guarding against excess wear and even high impact damage. It feels good under your feet, too.
- Light fantastic**  
 While it's no lightweight in performance, Barrier's certainly easier and safer to lift and handle compared with many underlays – thanks to its ultra-lightweight PE foam.

## Technical Data

Properties	Unit	Value Test	Method
Density	kg/m <sup>3</sup>	20 ± 2.0	internal
Impact Sound Reduction	dB	≥ 20	DIN EN 717-2
Temperature Stability (unloaded)	°C	75	internal
Thermal Conductivity of PE Foam measured at 10°C	W/m k	0.045	DIN 4108
Thermal Resistance of PE Foam	m <sup>2</sup> k/W	0.067	DIN 4108
Vapour Diffusion Resistance	m	≥ 40	DIN EN ISO 12572
Maximum Compression Load	kN/m <sup>2</sup>	≤ 2.0	DIN EN 1606
Resistance to Compression at 25% Deformation	to/m <sup>2</sup>	≥ 2.5	DIN 53 577
Tensile Strength, lengthwise*	N/mm <sup>2</sup>	≥ 0.30	DIN 53 571
Tensile Strength, crosswise*	N/mm <sup>2</sup>	≥ 0.15	DIN 53 571
Elongation at break, lengthwise*	%	≥ 100	DIN 53 571
Elongation at break, crosswise*	%	≥ 80	DIN 53 571

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.

## QA Flooring Solutions Ltd

Block H, Pickerings Road,  
 Widnes, Cheshire WA8 8XW  
 Tel: 0151 495 3434  
 Fax: 0151 420 9062  
 Email: sales@qaflooringsolutions.com  
[www.qaflooringsolutions.com](http://www.qaflooringsolutions.com)


**Simply Better**

Medium  
Traffic

Wood



## Best for

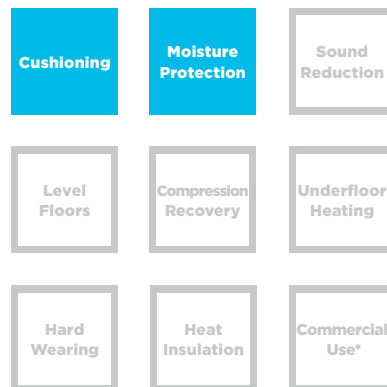

\*Suitable for hotels and public buildings

## Available in

<b>Code</b>	QAU-BAR-01
<b>Size</b>	1m x 15m (15m <sup>2</sup> )
<b>Thickness</b>	3mm