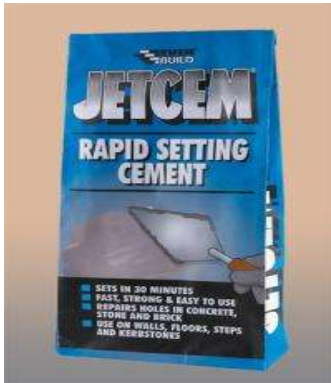


EVERBUILD JETCEM RAPID SET CEMENT

Colour	Product Code	Pack Size	Box Qty
Grey	JETCEM2	2KG	6
	JETCEM3	3KG	4
	JETCEM6	6KG	1

Product Description

JETCEM is a specially formulated rapid setting cement based patching/repair compound which when mixed with water sets in about 30 minutes.

Benefits

- Rapid setting (30 minutes, depending on ambient temperature and conditions).
- Easy mixing, just add water.
- Fills up to 25mm in one application (for deeper holes in excess of 25mm use Jetcem Premix sand/cement)

Areas for Use

- Internal and external repairs to gaps and cracks and walls and floors.
- Repairing flags, slabs, stones and bricks.
- Patching steps and window sills.
- Pointing brick and stone.
- Jointing earthenware pipes and drains.
- Repairs to ponds and pools.
- Setting in W/C's and sinks.
- Leak sealing in concrete based surfaces.
- Setting railings and posts.

Limitations

- This product should not be used for load bearing applications. Use EVERBUILD ANCHOR SET.
- For holes deeper than 25mm use Jetcem Premix Sand/Cement.
- Do not use where chemical resistance is required. Use EVERBUILD EPOXY MORTAR GP.
- Repairs to fishponds etc – seal repair with a suitable paint before re-stocking.
- It is always the user's responsibility to determine suitability of use. If in doubt, request technical data or contact Technical Services department.

Surface Preparation

Before applying, ensure surfaces are clean, sound and free from dust, crumbly material or any contaminants, which may affect adhesion.

Application

- Thoroughly wet surfaces to improve adhesion.
- Always use a clean mixing vessel and add approx. 3 parts by volume powder to one part by volume clean cold water and mix immediately to a smooth, reasonably thick slump free paste. The mixed cement will remain workable for 5-10 minutes only. **MIX NO MORE CEMENT THAN CAN BE USED IN 5 MINUTES**
- Press the cement into the repair with a trowel or filling knife.
- Once the product begins to stiffen, throw away the residue. **DO NOT ADD FURTHER WATER TO THE MIX. THIS WILL DESTROY STRENGTH.**
- In warm conditions, cover Jetcem with polythene to assist cure.
- Clean tools etc with warm water before Jetcem dries.

Health & Safety

Consult MSDS for full list of hazards.

Storage

Store in cool dry conditions between + 5°C and 25°C. Storage outside these parameters will significantly reduce shelf life.

Shelf Life

12 months in original unopened bag. This will reduce significantly once opened.

The technical data contained herein is based on our present knowledge and experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technological changes or research between the date of issue of this document and the date the product is acquired. Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.